


SPM 2500~6000TL-HU2

- UPS function, 10ms transition
- 1.6 DC/AC ratio with 2 MPPTs
- Up to 140A charging/discharging current
- Support DC-coupled, AC-coupled, AC-retrofit applications
- Type II Surge protection for DC and AC sides
- Support charge from diesel generator
- Support up to 9 units in parallel
- Support form a 400V three-phase system

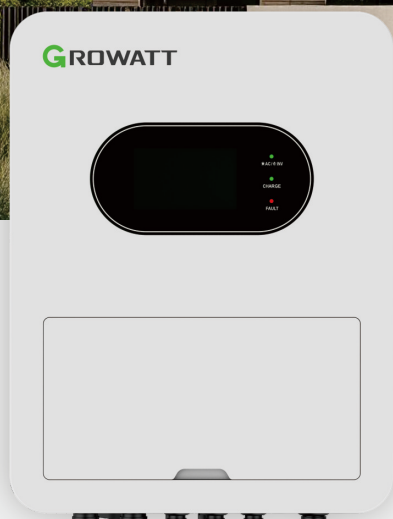

P O W E R
- I N G
T O M O R R O W

Datasheet	SPM 2500TL-HU2	SPM 3000TL-HU2	SPM 3600TL-HU2	SPM 5000TL-HU2	SPM 6000TL-HU2
Input data (DC)					
Max. recommended PV power(for module STC)	4000W	4800W	5760W	8000W	9600W
Max. DC voltage			550V		
Start voltage			70V		
MPPT voltage range			80V-525V		
No. of MPP trackers			2		
No. of PV strings per MPP tracker			1		
Max. input current per MPP tracker			18A		
Max. short-circuit current per MPP tracker			27.5A		
AC input data (AC)					
Nominal AC input power	2500W	3000W	3600W	5000W	6000W
Nominal input voltage			220V/230V/240V		
Nominal input current	10.9A	13.1A	15.7A	21.8A	26.1A
Max. grid passthrough current	12.5A	15A	18A	25A	30A
Max. generator input power			9200W		
Output data (AC)					
AC nominal power	2500W	3000W	3600W	5000W	6000W
Max. AC apparent power	2500VA	3000VA	3600VA	5000VA	6000VA
Nominal AC voltage (range*)			220V/230V/240V		
AC grid frequency (range*)			50Hz/60Hz		
Max. output current	10.9A	13.1A	15.7A	21.8A	26.1A
Adjustable power factor			0.8leading...0.8lagging		
THDi			<3%		
Battery data (DC)					
Battery voltage range			40~60V		
Max charging and discharging current	60A	70A	90A	120A	140A
Continuous charging and discharging power	2500W	3000W	3600W	5000W	6000W
Type of battery	Lithium battery/Lead-acid battery				
Backup power (AC)					
AC nominal output power	2500W	3000W	3600W	5000W	6000W
Nominal AC output voltage			220V/230V/240V		
Nominal AC output frequency			50/60Hz		
Switch time			<10ms		
Overload capability			200% Full Load@10S		
Efficiency					
Peak. efficiency			97.5%		
Europe efficiency			96.60%		
MPPT efficiency			99.0%		
Protection devices					
PV switch			Yes		
AC over current protection			Yes		
AC over voltage protection			Yes		
Ground fault monitoring			Yes		
Grid monitoring			Yes		
Anti-islanding protection			Yes		
Residual-current monitoring unit			Yes		
Insulation resistance monitoring			Yes		
AFCI protection			Optional		
Surge protection			DC Type II / AC Type II		
General data					
Max stackable number			9		
Dimensions (W / H / D)			345*450*255mm		
Weight			Gross Weight: 20kg	Net Weight: 16kg	
Operating temperature range			-25~60℃, >45℃ Derating		
Topology			Transformerless		
Cooling			Smart Fan Cooling		
Protection degree			Ip66		
Relative humidity			0~100%		
Altitude			< 2000m		
Display			LCD touch screen		
Interfaces: RS485/CAN/USB			Yes		
Communication			WIFI		
Warranty			5 years		
CE, IEC 62116, IEC 61683, IEC 61727, IEC 60068, NRS097, EN 61000					

* SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.